
VACUUM GLASS LIFTER

PB200



PB300



FB300



FB400



P200




ND400



CANTILEVER CRANE LIFTER

TECHNICAL PARAMETER

Model	WL-200	WL-300	WL-500
Rated load	200kg	300kg	500kg
Sucker diameter	250mm	250mm	250mm
Sucker qty	2	4	6
Vertical turning	0°-90°	0°-90°	0°-90°
rotation	360°	360°	360°
Air pressure	>0.5bar	>0.5bar	>0.5ba
Arm	4m length	4m length	4m length
Support beam	3.5m height	3.5 m height	4 m height

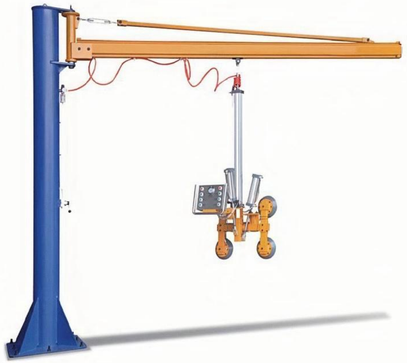

GLASS VACUUM LIFTER



TECHNICAL PARAMETER

Name	Glass lifter
Model	VT800
Volt	DC 12V
Batterty life	30-40 hours
Sucker	8 pcs
Moment power-off protection	30 minutes
Weight	130 KG
Sucker diameter	300mm

DESCRIPTION

The glass lifter can be combined and operated with many different carrier facilities,such as crane,elevator, wheel loaders, fork lifts. Manual rotation, 360° edgewise, with locking at each quarter point Manual tilt, 90° between upright and flat, with automatic latching in upright position

GLASS LIFTER



TECHNICAL PARAMETER

Model	GLR300/GLR400
Volt	12V*4
Work load limit	300 kg
Net weight	180kg
Diameter of suction cup	10" (250mm)
Number of suction cups	6 pcs/8 pcs (300KGS/400 KGS lifting capability)

Features

This electric lifter can help people to handle or transport glass easily,unload glass from truck, glass installation indoors, as well as for curvedglass,such as bus glass, windscreen glass and so on.

ELECTRIC GLASS STORAGE RACK

TECHNICAL PARAMETER

Model	Number Rack	Max loading weight per rack	Glass size	Overal size
W30-1824	30	3500 kg	1830*2440	11.6m
W30-2436	30	4000 kg	2440*3660	13.7m
W30-2842	30	8000 kg	2800*4200	14.3m
W15-3361	15	8000 kg	3300*6100	9.5m

Features

The original glass mobile storage rack is composed of 30 glass racks, which can store 30 packs of original glass sheets of different varieties. Customers can access the glass on any one of the glass racks according to their needs, and can take the whole package of single sheets.

