
GLASS SANDBLASTING MACHINE



PRODUCT DETAILS

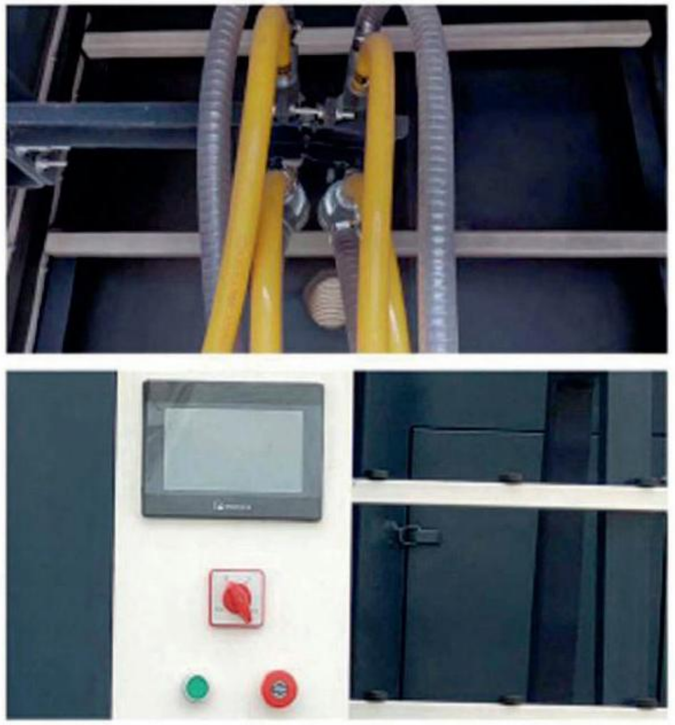

TECHNICAL PARAMETER

Model	PS-1600	PS-2000	PS-2500
Max. Size	1600*2000mm	2000*3000mm	2500*3500mm
Min. Size	350*350mm	350*350mm	350*350mm
Thickness of Glass	5-50 mm	5-50 mm	5-50 mm
Sandblasting Speed	15-20m²/h	20-25m²/h	25-30m²/h
Total Power	1.9KW	1.9KW	1.9KW
Overall size	4800*1500*2520mm	4800*1500*3100mm	4800*1500*3600mm
Weight	1000kg	1200kg	1400kg
Voltage	customized	customized	customized

DESCRIPTION

Glass Automatic Sandblasting Machine, touch screen PLC control, either manual or automatic operate function, with 3 automatic blasting guns and 1 manual operation gun, suitable for processing flat glass thickness 5-50mm for steric pattern, timing belts glass transmission, when glass arrive the position for sandblasting, the 3 blasting guns driven move up-and-down to spurt out sand. The height and the width of sandblasting can be adjusted according to the requirement. The advantages of the belts are stable on transmission, high efficiency and easy maintenance. The drive structure of the blasting gun is outside the machine which is good for a long period of working and daily maintenance.